



# LINEAR GRILLE SUPPORTS

When using linear grilles, FV trench heater model casings must be raised by 20 mm to enable correct installation of supports for this type of grille. When ordering linear grilles for all types of trench heaters, the actual depth including the 20 mm increase must be entered as the 'depth' value in the order code. Supports are not necessary for steel and stainless steel grilles up to a width of 320 mm – these grilles are self-supporting. All other linear grilles require supports. Example trench heater measurements with linear grilles: FVO 200/70 with roll-up grille = FVO 200/90 with linear grille.


## KORAFLEX Optimal-V FVO, Energy FVE

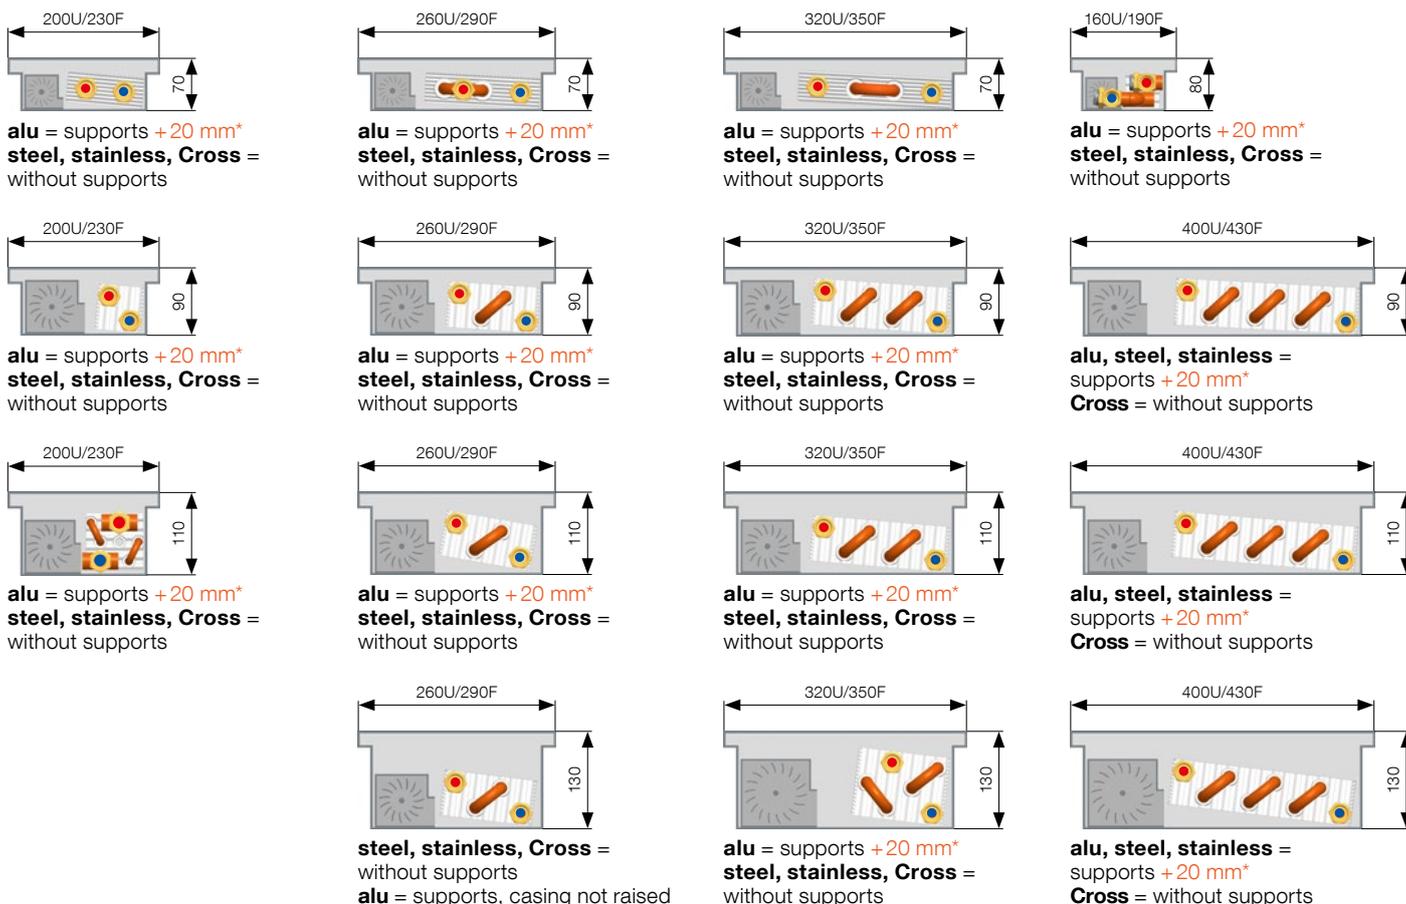


## KORAFLEX Variant F2V

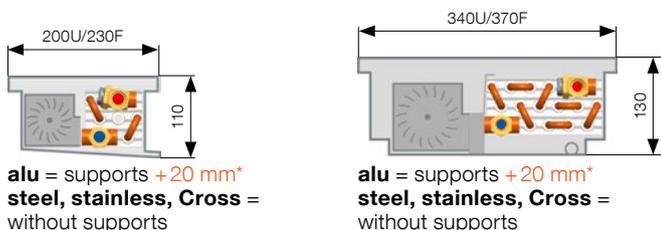

## KORAFLEX Variant F4V



## KORAFLEX Pool-V FVP



\* given trench heater casing heights must be raised by 20 mm.